



Commercial Guide



ALLEGION™



# Commercial Guide



# Contents

<b>4</b>	<b>Introduction</b>		
<b>5</b>	<b>Door Furniture</b>		
6	Legge 5300 & 5400 Series		
7	Legge 500 & 700 Series		
8	Legge 6000 Series		
9	Legge 8000 Series		
11	Legge 67 Series		
12	Legge Escutcheons for 6000 Series		
12	Legge Escutcheons for 8000 Series		
12	Legge Escutcheons for 67 Series		
14	Legge 800 Series		
14	Legge 4000 Series		
15	Legge G2 Series		
15	Legge G2 Deadbolt		
16	Normbau Antibacterial Series		
<b>19</b>	<b>Electronic Locks</b>		
20	Schlage CO Series		
21	Briton 9360 & 9365		
<b>23</b>	<b>Entrance Handles</b>		
24	Legge Entrance Handles 1100 & 1200 Series		
<b>25</b>	<b>Locks</b>		
26	Legge 990MF Mortice Locks		
27	Legge 995MF Narrow Stile Mortice Lock		
27	Legge 950, 951 Short Backset Deadlocks		
<b>29</b>	<b>Door Controls</b>		
30	LCN 4031 & 4031T Series Door Closer		
30	LCN 1461 & 1461T Series Door Closer		
31	LCN 4040XP & 4040XPT Series Door Closer		
31	LCN 3130 Series Concealed Track Door Closer		
32	Briton 200 Series Door Closer		
32	Briton 1120 & 1130 Series Door Closer		
33	Briton 5000 & 7500 Floor Springs		
33	Briton 2800 Transom Closer		
<b>34</b>	<b>Door Coordinators</b>		
34	Ives COR		
34	Briton Door Selectors		
<b>35</b>	<b>Auto Flush Bolts</b>		
35	Ives FB 41 Series		
35	Ives DP2 Socket		
<b>37</b>	<b>Exit Devices</b>		
38	Briton 378E Series Reversible Rim Panic Latch		
38	Briton 376E Series Vertical Panic Bolt		
39	Von Duprin 22 Series Exit Devices		
40	Von Duprin 33A & 88 Series Exit Devices		
41	Von Duprin 99 Series Exit Devices		
<b>43</b>	<b>General Hardware</b>		
44	Legge Door Stops and Hooks		
44	Legge Pull Handles & Push Plates		
45	Legge Architectural Hinges		
45	Legge Flush Pulls		
45	Legge Signage		
46	Legge Latchbacks		
46	Legge Bolts		
47	Legge Grabrails		
47	Legge Indicator bolts		
<b>48</b>	<b>Handing and general information</b>		
<b>50</b>	<b>Architectural hardware consulting services</b>		

# Introduction

With the ever-increasing technical complexity of building, fire and disability code compliance, it is now more important than ever to specify the appropriate product for security and life-safety.

Let our team of technically trained consultants assist your product specification and door hardware scheduling to ensure these codes are met.

We have sales offices located in Brisbane, Melbourne, Perth, Sydney, Auckland, Christchurch and Wellington, and are happy to discuss any requirements or queries you may have.

## Total Solutions

Independently or as an integrated total solution, we can tailor an option to suit your individual security and safety needs for home and business.

**Briton** - Door Closers, Emergency Exit Devices, Fire Door Controls, Floor Springs, Transom Closers

**Cisa** - Euro Mortice Locks, Hotel Locking Systems, Safes

**FSH** - Electromechanical Locking Devices

**Falcon** - Auto Swing Door Operator, Exit Devices

**Glynn-Johnson** - Door Controls

**Ives** - Door Controls, General Hardware

**LCN** - Auto Equalisers, Door Closers, Fire Door

Controls, Benchmark Auto Swing Door

**Legge** - Door Furniture, Electric Lock, Locks and Latches, Keying Systems, Entrance Handles, General Hardware, Hinges, Latches

**Schlage Electronic Systems** - Software Managed Access Systems, Access Control Biometric Readers, Electromechanical Locks, Electromagnetic Locks, Electronic Control Systems and Releasing Devices

**Schlage** - Door Furniture, Entrance Handles, General Hardware, Keying Systems, Locks and Latches, HandKey: Biometric Access Controls, HandPunch: Time and Attendance

**Von Duprin** - Emergency Exit Hardware, Electronic Door Control Products, Exit Devices



Door  
Furniture





**Alessandro (55)**  
(H65mm x L117mm)  
(minimum backset 23mm)



**Alpha (29)**  
(H65mm x L120mm)  
(minimum backset 23mm)



**Angelo (57)**  
(H49mm x L125mm)  
(minimum backset 30mm)



**Bergen (B)**  
(H50mm x L107mm)  
(minimum backset 30mm)



**Chagall (51)**  
(H66mm x L116mm)  
(minimum backset 30mm)



**Cisa (59)**  
(H54mm x L130mm)  
(minimum backset 23mm)



**Diablo (15)**  
(H60mm x L125mm)  
(minimum backset 23mm)



**Ergo (62)**  
(H58mm x L123mm)  
(minimum backset 30mm)



**Flaire (F)**  
(H57mm x L111mm)  
(minimum backset 30mm)



**Leonardo (12)**  
(H56mm x L118mm)  
(minimum backset 30mm)



**Monet (50)**  
(H60mm x L121mm)  
(minimum backset 23mm)



**Neptune (N)**  
(H62mm x L127mm)  
(minimum backset 30mm)



**Renoir (52)**  
(H54mm x L116mm)  
(minimum backset 30mm)



**Rubens (56)**  
(H67mm x L137mm)  
(minimum backset 38mm)



**Salvador (27)**  
(H58mm x L117mm)  
(minimum backset 30mm)



**Trilo (61)**  
(H58mm x L123mm)  
(minimum backset 30mm)

Technical Specifications	Plate Functions	Finishes	Warranty	Accessories
- All lever designs available on both 5300 and 5400 plates	Plain	CP - Chrome Plate	10 year	- Extended Screws
- 5300 Series (Square End Plate)	Oval Cylinder Hole	PB - Polished Brass	mechanical	<b>Locks/Latches:</b>
- 5400 Series (Round End Plate)	Turn Snib	SCP - Satin Chrome Plate		- Legge 995MF Mortice Lock (990MF Mortice Lock on request)
<b>Material:</b>	Emergency Release			
- Forged Brass	Indicating Turn Bar			
- Extruded Brass Plates				
<b>Plate Dimensions:</b>				
- L185mm x W25mm x D12mm				
<b>Door Thickness:</b>				
- 32mm - 55mm				
- 56mm - 75mm (use extended screws)				



**Alessandro (55)**  
(H64mm x L117mm)



**Alpha (A)**  
(H52mm x L120mm)



**Angelo (57)**  
(H49mm x L125mm)



**Bergen (B)**  
(H49mm x L107mm)



**Chagall (51)**  
(H53mm x L116mm)



**Cisa (59)**  
(H54mm x L130mm)



**Diablo (15)**  
(H59mm x L125mm)



**Ergo (62)**  
(H57mm x L123mm)



**Flaire (F)**  
(H57mm x L111mm)



**Leonardo (12)**  
(H55mm x L118mm)



**Monet (50)**  
(H59mm x L121mm)



**Neptune (N)**  
(H59mm x L127mm)



**Renoir (52)**  
(H65mm x L116mm)



**Rubens (56)**  
(H66mm x L137mm)



**Salvador (27)**  
(H56mm x L117mm)



**Trilo (61)**  
(H57mm x L123mm)

Technical Specifications	Plate Functions	Finishes	Warranty	Accessories
- All lever designs available on both 500 and 700 plates	Plain	CP - Chrome Plate	10 years	- Extended Screws
- 500 Series - (Round End Plate)	Oval Cylinder Hole	PB - Polished Brass	mechanical	<b>Locks/Latches:</b>
- 700 Series - (Square End Plate)	Turn Snib (non-indicating/indicating)	SCP - Satin Chrome Plate		- Legge 990MF Mortice Lock
<b>Material:</b>	Emergency Release (non-indicating/indicating)			- Legge 990MFE Mortice Lock
- Forged Brass	Large Turn (non-indicating/indicating)			
<b>Plate Dimensions:</b>	Turn Bar (non-indicating/indicating)			
- 500 Series - L168mm x W48mm x D11mm				
- 700 Series - L168mm x W48mm x D11mm				
<b>Door Thickness:</b>				
- 32mm - 55mm				
- 56mm - 75mm (use extended screws)				



Alessandro (55)  
(H66mm x L117mm)



Alpha (29)  
(H53mm x L120mm)



Angelo (57)  
(H48mm x L126mm)



Bergen (B)  
(H50mm x L107mm)



Chagall (51)  
(H54mm x L116mm)



Cisa (59)  
(H49mm x L129mm)



Diablo (15)  
(H49mm x L107mm)



Ergo (62)  
(H58mm x L123mm)



Flaire (F)  
(H49mm x L107mm)



Leonardo (12)  
(H56mm x L118mm)



Monet (50)  
(H61mm x L125mm)



Neptune (N)  
(H60mm x L127mm)



Renoir (52)  
(H54mm x L116mm)



Rubens (56)  
(H67mm x L137mm)



Salvador (27)  
(H58mm x L117mm)



Trilo (61)  
(H56mm x L123mm)

Technical Specifications	Functions	Finishes	Warranty	Accessories
<b>Rose Specifications:</b> - Ø55mm x D12mm - Concealed Fixing <b>Material:</b> - Forged Brass Levers - Die Cast Roses <b>Backset:</b> - 60mm standard on Passage and Privacy Latch - Suitable to use Latch Furniture with Mortice Locks and Escutcheons <b>Door Thickness:</b> - Passage and Furniture 32mm - 55mm - Privacy 32mm - 42mm	6000 - Latch Furniture 6001 - Half Set 6002 - Dummy 6003 - Blank Rose 6005 - Passage 6006 - Privacy	CP - Chrome Plate PB - Polished Brass SCP - Satin Chrome Plate	10 year mechanical	- Extended Screws <b>Locks/Latches:</b> - Schlage 60mm Latchbolt* - Legge 990MF Mortice Lock - Legge 990MFE Mortice Lock <b>Escutcheons:</b> - Legge 6000 Series Escutcheons

\*Light Commercial Applications only



Alpha (29)  
(H52mm x L120mm)



Angelo (57)  
(H48mm x L126mm)



Bergen (B)  
(H50mm x L107mm)



Cisa (59)  
(H49mm x L129mm)



Diablo (15)  
(H61mm x L125mm)



Leonardo (12)  
(H56mm x L118mm)



Neptune (N)  
(H60mm x L127mm)



Salvador (27)  
(H58mm x L117mm)

Technical Specifications	Functions	Finishes	Warranty	Accessories
- All lever designs in 6000 Series available in 8000 Series <b>Material:</b> - Forged Brass Levers - Die Cast Roses <b>Rose Specifications:</b> - W57mm x L57mm x D12mm - Concealed Fixing <b>Backset:</b> - 60mm standard on Passage and Privacy Latch - Suitable to use Latch Furniture with Mortice Locks and Escutcheons <b>Door Thickness:</b> - Passage and Furniture 32mm - 55mm - Privacy 32mm - 42mm	8000 - Latch Furniture 8001 - Half Set 8002 - Dummy 8003 - Blank Rose 8005 - Passage 8006 - Privacy	CP - Chrome Plate SCP - Satin Chrome Plate	10 year mechanical	- Extended Screws <b>Locks/Latches:</b> - Schlage 60mm Latchbolt* - Legge 990MF Mortice Lock - Legge 990MFE Mortice Lock <b>Escutcheons:</b> - Legge 8000 Series Escutcheons

\*Light Commercial Applications only



Alessandro (55)  
(H64mm x L117mm)



Alpha (A)  
(H52mm x L120mm)



Angelo (57)  
(H49mm x L125mm)



Bergen (B)  
(H49mm x L107mm)



Chagall (51)  
(H53mm x L116mm)



Cisa (59)  
(H58mm x L130mm)



Diablo (15)  
(H59mm x L125mm)



Ergo (62)  
(H56mm x L123mm)



Flaire (F)  
(H57mm x L111mm)



Leonardo (12)  
(H55mm x L118mm)



Monet (50)  
(H59mm x L121mm)



Neptune (N)  
(H59mm x L127mm)



Renoir (52)  
(H53mm x L116mm)



Rubens (56)  
(H66mm x L137mm)



Salvador (27)  
(H57mm x L123mm)



Trilo (61)  
(H55mm x L123mm)

Technical Specifications	Functions	Finishes	Warranty	Accessories
<b>Material:</b> - Forged Brass Levers and Roses <b>Rose Specifications:</b> - Ø63mm x D11mm - Concealed Fixing <b>Fixing:</b> - 67 - Latch (face fix) - L67 - Lock/Latch (concealed exterior) <b>Door Thickness:</b> - 32mm - 55mm - 56mm - 75mm (use extended screws)	67 - Latch Furniture 67L - LR Latch Furniture 67LE - External Half Set 67LEF - External Half Set Fixed (dummy) 67LI - Internal Half Set 67LIF - Internal Half Set Fixed (dummy) L67EBR - External Blank Rose L67IBR - Internal Blank Rose	CP - Chrome Plate PB - Polished Brass SCP - Satin Chrome Plate	10 year mechanical	- Extended Screws <b>Locks/Latches:</b> - Schlage 60mm Latchbolt* - Legge 990MF Mortice Lock - Legge 990MFE Mortice Lock <b>Escutcheons:</b> - Legge 67 Series Escutcheons

\*Light Commercial Applications only



ESCUTCHEONS FOR 6000 SERIES



Oval Cylinder Hole  
(Euro available)



Turn Snib  
(non-indicating/  
indicating)



Emergency Release  
(non-indicating/  
indicating)



Large Turn  
(non-indicating/  
indicating)



Large Turn Bar  
(non-indicating/  
indicating)

Technical Specifications	Finishes	Warranty
- Ø50mm x D9mm - Concealed Fixing - Brass	CP - Chrome Plate PB - Polished Brass SCP - Satin Chrome Plate	10 year mechanical

ESCUTCHEONS FOR 8000 SERIES



Oval Cylinder Hole  
(Euro available)



Turn Snib  
(non-indicating/  
indicating)



Emergency Release  
(non-indicating/  
indicating)



Large Turn  
(non-indicating/  
indicating)



Large Turn Bar  
(non-indicating/  
indicating)

Technical Specifications	Finishes	Warranty
- W50mm x L50mm x D9mm - Concealed Fixing - Brass	CP - Chrome Plate SCP - Satin Chrome Plate	10 year mechanical

ESCUTCHEONS FOR 67 SERIES



Oval Cylinder Hole  
(22/26)



Turn Snib  
(23/27)



Emergency Release  
(24/28)

Technical Specifications	Finishes	Warranty
- Ø50mm x D9mm - 22, 23, 24 - Forged Brass - 26, 27, 28 - Pressed Brass	CP - Chrome Plate PB - Polished Brass SCP - Satin Chrome Plate	10 year mechanical





800 SERIES



Alpha (A)  
(H52mm x L120mm)



Bergen (B)  
(H44mm x L107mm)



Technical Specifications	Plate Functions	Finishes	Warranty	Accessories
<b>Plate Dimensions:</b> - W152mm x L152mm x D6mm	Plain	SCP - Satin	10 year	- Extended Screws
<b>Material:</b> - Forged Brass levers + plates	Oval Cylinder Hole	Chrome Plate	mechanical	<b>Locks/Latches:</b>
<b>Door Thickness:</b> - 32mm - 65mm	Turn Snib (non-indicating/indicating)			- Legge 990MF
<b>Fixing:</b> - Back to back	Emergency Release			Mortice Lock
- Concealed fixing on external plates	(non-indicating/indicating)			- Legge 990MFE
	Large Turn (non-indicating/indicating)			Mortice Lock
	Turn Bar (indicating)			

4000 SERIES



Alpha (29)  
(Lever)



Janneck (26)  
(Fixed Pull)



Technical Specifications	Functions	Finishes	Warranty	Accessories
<b>Plate Dimensions:</b> - Alpha W162mm x L162mm x D62mm	Plain	SSS - Satin	10 year	- Extended Screws
- Janneck W162mm x L162mm x D58mm	Oval cylinder hole	stainless steel	mechanical	<b>Locks/Latches:</b>
<b>Material</b> - US Grade 304 Stainless Steel lever + plate	Turn Snib (non indicating/indicating)			- Legge 990MF
<b>Door Thickness:</b> - 32mm - 65mm	Emergency Release			Mortice Lock
<b>Fixing:</b> - Back to back	(non indicating/indicating)			- Legge 990MFE
- Concealed fixing external plate	Turn Bar (indicating)			Mortice Lock

G2 SERIES



Orbit  
(H63mm x L127mm)



Neptune (N)  
(H63mm x L127mm)



Sparta  
(H63mm x L127mm)



Fire Rated

Technical Specifications	Functions	Finishes	Warranty
- ANSI grade 2 performance - Vandlgard® Option <b>Rose Specifications:</b> - Orbit – 70mm - Neptune/Sparta – 75mm - Concealed Fixing <b>Backset:</b> - 70mm standard, 60mm & 127mm available <b>Door Thickness:</b> - 32mm – 50mm, 45mm-60mm available (Neptune/Sparta) <b>Keyways:</b> - 6 Pin C4 Profile	<b>Orbit</b> Entrance Lock  <b>Neptune/Sparta</b> Entrance Lock Passage Latch Privacy Latch Classroom Latch Storeroom Lock Single Dummy Trim	<b>Orbit</b> SSS - Satin Stainless Steel  <b>Neptune/Sparta</b> SCP - Satin Chrome Plate	10 year mechanical and finish

G2 DEADBOLT



G2 Series Double Cylinder  
(key/key)



G2 Series Single Cylinder  
(key/turn)

Technical Specifications	Functions	Finishes	Warranty
- ANSI grade 2 performance <b>Rose Specifications:</b> - Ø65mm <b>Backset:</b> - 60mm or 70mm <b>Door Thickness:</b> - 32mm - 50mm <b>Keyway:</b> - 6 Pin C4 Profile	Double Cylinder (key/key) Single Cylinder (key/turn)	SSS - Satin Stainless Steel	10 year mechanical and finish



Microban® antibacterial protection actively prevents bacterial growth

Introducing the Normbau range: improved hygiene products with integrated Microban® antibacterial protection.

WHAT IS MICROBAN® ANTIBACTERIAL PROTECTION?

Microban® antibacterial protection is built-in to solid products during manufacture to provide an extra level of hygiene. This provides added antibacterial protection for the products, preventing the growth of harmful micro-organisms such as bacteria, mould and mildew. Microban® technology, combined with conventional cleaning methods, helps to improve standards of hygiene and offers added protection wherever it is used.

HOW DOES THE MICROBAN® ANTIBACTERIAL PROTECTION ACTUALLY WORK?

Microban® is incorporated into the scratch-resistant powder coating / polymer structure of the material during the manufacturing process and is thus evenly distributed throughout the product. Once bacteria come into contact with the Microban® surface, the technology works by disrupting its biological functioning, the lifecycle cannot proceed and the bacteria then die. Normbau products featuring Microban® offer targeted product protection.



HOW DOES THE MICROBAN® ANTIBACTERIAL PROTECTION ACTUALLY WORK?

Since Microban® protection is built into the product during manufacture, it cannot be washed or wiped off. Microban® protects the products over their entire lifetime. The antibacterial properties of silver have been known for centuries and Normbau uses a third generation silver antibacterial technology from Microban®. Microban® 3G Silver™ offers long term active protection against harmful bacteria, including Escherichia coli (E. coli), Staphylococcus aureus (S. aureus), Methicillin-resistant Staphylococcus aureus (MRSA) and salmonella.

TESTED BY INDEPENDENT LABORATORIES

Microban® technology has been proven to be safe and effective in extensive testing by independent laboratories and has an excellent track record of success over many years in use.

Within Europe, it is registered for all intended applications in accordance with the BPD (Biocidal Products Directive) and with the FDA (Food and Drug Administration) in the US. Microban® additives are integrated in products and medical products from leading consumer, pharmaceutical and industrial goods manufacturers worldwide.

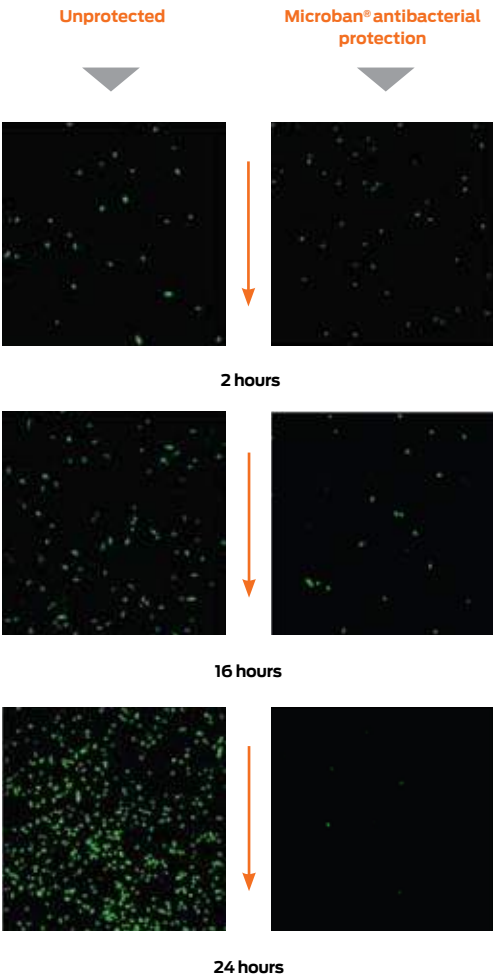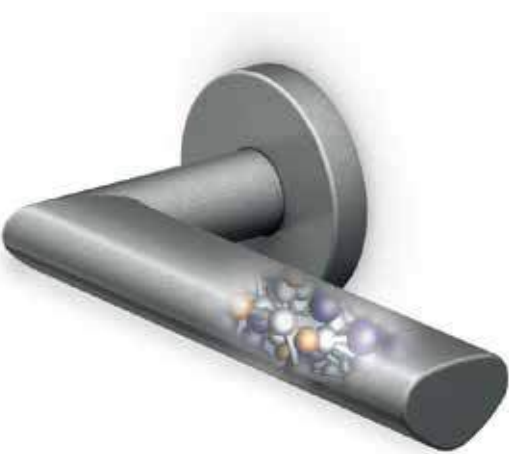


This information is based upon standard laboratory tests (ISO 22196) and is provided for comparative purposes to substantiate antimicrobial activity for non-public health applications.

NORMBAU - DISTINCTIVE STYLE AND SECURITY

Constructed from a high-quality nylon polyamide, Normbau uses the latest technology to produce door hardware that feels superb and is exceptional to use. Smooth and brilliantly coloured surfaces which are highly resistant to abrasion, the nylon polyamide ensures the Normbau Antibacterial range can be cleaned with most solvents, chemicals, cleansing agents and disinfectants without damaging the surface or the built-in Microban technology.

Suitable for use in commercial and government facilities, Normbau has been tested to exceed the highest durability rating (D8, 500,000 cycles) and has been awarded a physical security rating of S8 under the Australian Standard AS4145.2.

Normbau is also compliant with AS1428.1-2009 Design for access & mobility standard.

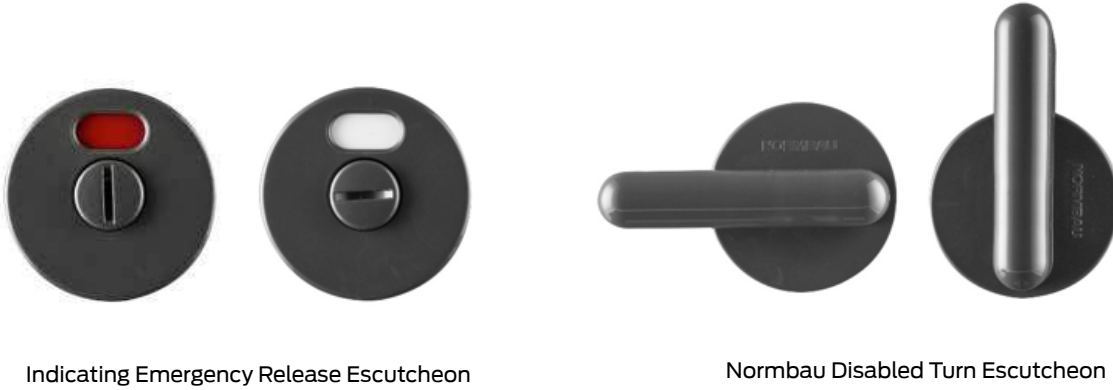

NORMBAU ANTIBACTERIAL HARDWARE IS AVAILABLE IN THE FOLLOWING STANDARD COLOURS:



\* More colours are available (minimum order quantities apply). Please speak with your Allegion consultant for more details.



**SCHLAGE**

**Briton**

Electronic  
Locks





CO 100



CO 200



Fire Rated

CO 100

Features	Functions	Certifications	Battery Life	Finish	Warranty
- Manually Programmable - Up to 500 users - 3 – 6 digit PIN codes - User rights stored on lock - Available in Cylindrical or Mortice Lock with 70mm backset as standard	Classroom Storeroom Office	ANSI Grade 1	Up to 2 years	SCP - Satin Chrome Plate*	1 year electronic 10 year finish and mechanical


CO 200

Features	Functions	Certifications	Operation	Finish	Warranty
- Computer programmable with audit trail - Up to 2000 users and 2000 audit trails - Up to 32 holidays and 16 time zones - Available in Cylindrical or Mortice Lock with 70mm backset as standard	Classroom Storeroom Office Privacy	ANSI Grade 1	Keypad Proximity card Magnetic stripe	SCP - Satin Chrome Plate*	1 year electronic 10 year finish and mechanical

\*Other finishes available on request



9360

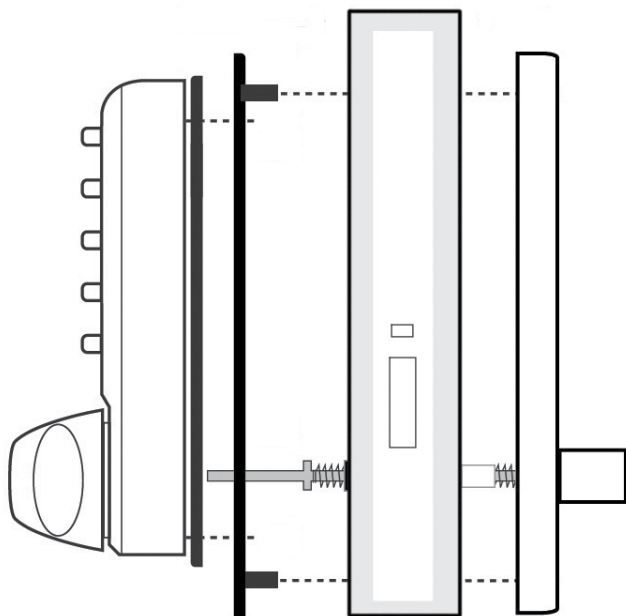

9365

9360

Features	Lock	Power	Finish	Warranty	Door thickness	Activation
- Manually programmable - Up to 80 user codes - Up to 10 one-time user codes - 4 – 6 digit PIN codes - Non-handed - PVD weather resistant finish	- 9360 – Tubular Latch - 60mm Backset	2 x AA batteries	Brushed Steel	1 year electronic 10 year finish and mechanical	35mm- 65mm	- Reprogramme at the door - Output for fire alarm or remote unlocking

9365

Features	Lock	Power	Finish	Warranty	Door thickness	Activation
- Manually programmable - Up to 80 user codes - Up to 10 one-time user codes - 4 – 6 digit PIN codes - Non-handed - PVD weather resistant finish - Kit available with 995 lock & 5300 Alpha internal lever	- 995 Mortice Lock - 30mm Backset	2 x AAA batteries	Brushed Steel	1 year electronic 10 year finish and mechanical	35mm-50mm 51mm-65mm (use extended screws)	- Reprogramme at the door - Output for fire alarm or remote unlocking



## Entrance Handles



ENTRANCE HANDLES 1100 & 1200 SERIES

1192	1195	1213	1222
			
Overall Length (mm) 482 or 632 Dimension (mm) Ø32	450 or 600 Ø32	325, 475 or 625 25 x 25 section	332, 482 or 632 Ø32
1231	1244	1246	1285 (Offset)
			
Overall Length (mm) 332, 482 or 632 Dimension (mm) Ø32	325, 475 or 625 25 x 25 section	325 or 625 50 x 25 section	380, 530 or 680 Ø32

Technical Specifications	Finish	Warranty	Accessories
<div>- Supplied for back to back fixing</div> <div>- Other designs and sizes available on indent, price and leadtime on application</div> <div><b>Door Type:</b><div>- Wood</div><div>- Glass</div><div>- Metal</div></div> <div><b>Door Thickness:</b><div>- Timber or aluminium 30-55mm</div><div>- Glass 8-12mm</div></div>	<div>SSS - Satin</div> <div>Stainless Steel (US304 Grade)</div>	<div>10 year</div> <div>mechanical and finish</div>	<div><b>Locks/Bolts:</b><div>- Legge 990MF Deadlock or N Series</div><div>- Short Backset Deadlocks 950 &amp; 951</div></div> <div><b>Locks/Bolts:</b><div>- 990 C4 Oval</div><div>- ME C4 Euro</div><div>- Schlage 5 or 6 Pin Euro</div></div> <div><b>Escutcheons:</b><div>- Oval Cylinder (round or square)</div><div>- Euro Cylinder (round or square)</div><div>- Turn (round or square)</div><div>- Single Fix Kit</div></div>



Locks

990MF MORTICE LOCKS



Combination and Vestibule  
(C, CD & V Series)



Deadlock  
(D Series)



Nightlatch  
(N Series)



Sliding Door  
(S Series)



Technical Specifications	Functions	Finishes	Warranty	Accessories
<b>Backset:</b> - 60mm Standard, 70, 89 & 127mm available	C - Combination	CP - Chrome Plate	10 year mechanical	- Rebate Kit (R13)
<b>Door Thickness:</b> - 32mm - 50mm standard, up to 90mm available	D - Deadlocking	PB - Polished Brass		- Extended spindles
<b>Door Type:</b> - Wood - Metal	CD - Combination Dual Deadlocking	SCP - Satin Chrome Plate		- Long Lipped Strike
	N - Nightlatch	Stainless Steel inner & outer		<b>Cylinder:</b> - Oval Cylinder
	S - Sliding doors	Forend + strike supplied as standard		<b>Furniture:</b> - Legge 5300 & 5400 Series
	V - Vestibule	Other finishes available on request		- Legge 6000 & 8000 Series
				- Legge 500 & 700 Series
				- Legge 800 & 4000 Series
				- Legge 67 Series
				- Normbau

995MF NARROW STILE MORTICE LOCK



Combination / Vestibule

Technical Specifications	Functions	Finishes	Warranty	Accessories
<b>Backset:</b> - 23mm standard - 30mm & 38mm available	C - Combination V - Vestibule	CP - Chrome Plate PB - Polished Brass SCP - Satin Chrome Plate	10 year mechanical	- Extended spindles
<b>Door Thickness:</b> - 32mm - 50mm standard - 51mm - 76mm available				- <b>Cylinder:</b> - Oval Cylinder
<b>Door Type:</b> - Metal - standard - Wood - available				<b>Furniture:</b> - Legge 5300/5400 Series - Timber Face Plate

SHORT BACKSET DEADLOCKS



950



951

Technical Specifications	Functions	Finishes	Warranty	Accessories
<b>Backset:</b> - 23mm standard	950 - Swing door 951 - Sliding door	SCP - Satin Chrome Plate	10 year mechanical	- 950/951-Cylinder
<b>Door Thickness:</b> - 32mm - 50mm				- Double Cylinder to suit 950/951
<b>Door Type:</b> - Metal				





**Briton**  
**LCN**

Door  
Controls

LCN 4031 & 4031T SERIES DOOR CLOSER



Model	Door Size	Closer Strength	Door Type	Functions
4031	- Internal: 660mm - 1219mm - External: 660mm - 914mm	1-4 Adjustable	Interior, Exterior, Wood or Metal	Regular (REG) Hold Open (HO)
4031T	Internal: 660mm - 965mm	1-3 Adjustable	Interior, Wood or Metal	Regular (REG) Hold Open (HO)

Technical Specifications	Finishes	Warranty	Accessories
- Universal, fully reversible, non handed door closer - Independent adjustable valves for Backcheck, Closing and Latching speeds - Tested in accordance with AS/NZS 1905 Part 1-1997 - High strength cast iron construction	ALUM - Aluminium	30 year mechanical	- Adaptor Plate - Drop Plate - Rust inhibitor pre-treatment

LCN 1461 & 1461T SERIES DOOR CLOSER



Model	Door Size	Closer Strength	Door Type	Functions
1461	- Internal: 610mm - 1524mm - External: 610mm - 1219mm	1-6 Adjustable	Interior, Exterior, Wood or Metal	Regular (REG) Hold Open (HO) Delayed Action (DA) Cush-N-Stop (CNS) Hold Open Cush-N-Stop (HOCNS)
1461T	Internal: 660mm - 965mm	1-3 Adjustable	Interior, Wood or Metal	Regular (REG) Hold Open (HO) Track Bumper

Technical Specifications	Finishes	Warranty	Accessories
- Universal, fully reversible, non handed door closer - Independent adjustable valves for Backcheck, Closing and Latching speeds - Tested in accordance with AS/NZS 1905 Part 1-1997 - High strength cast iron construction	ALUM - Aluminium	30 year mechanical	- Adaptor Plate - Drop Plate - Full Metal cover - Rust inhibitor pre-treatment

LCN 4040XP & 4040XPT SERIES DOOR CLOSER



Model	Door Size	Closer Strength	Door Type	Functions
4040XP	- Internal: 610mm - 1524mm - External: 610mm - 1219mm	1-6 Adjustable	Interior, Exterior, Wood or Metal	Regular (REG), Hold Open (HO) Cush-N-Stop Hold Open Cush-N-Stop*
4040XPT	Internal: 660mm - 1219mm	1-4 Adjustable	Interior, Wood or Metal	Regular (REG), Hold Open (HO)

Technical Specifications	Finishes	Warranty	Accessories
- Universal, fully reversible, non handed door closers - Independent adjustable valves for backcheck, closing and latching speeds - High strength cast iron construction	ALUM - Aluminium	30 year mechanical	- Adaptor Plate - Drop Plate - Hold open arm - Hold open Cush-N-Stop arm - Rust inhibitor pre-treatment

\*LCN4041 Delayed Action model also available. Please speak to your Allegion consultant for more information

LCN 3130 SERIES CONCEALED DOOR CLOSER



Technical Specifications	Functions	Finishes	Warranty
<b>Door Size:</b> - 864mm to 965mm <b>Door Handing:</b> - Right or Left (See handing chart) <b>Minimum Door Thickness:</b> - 44mm - Independent adjustable valves for Backcheck, Closing and Latching speeds <b>Door Type:</b> - Interior Wood or Metal Doors <b>Fixed Strength:</b> - 2 or 3 only - High strength cast iron construction	Regular (REG) Hold Open (HO)	ALUM - Aluminium	15 year mechanical





200 Series Door Closer



Technical Specifications	Functions	Finish	Warranty	Accessories
<ul style="list-style-type: none"><li>- Universal application fits standard, top jamb and parallel arm installations</li><li>- European style trim cover</li><li>- Independent adjustable valves for Backcheck, Closing and Latching speeds</li></ul> <b>Door Type:</b> <ul style="list-style-type: none"><li>- Interior, Wood or Metal</li></ul> <b>Closer Strength:</b> <ul style="list-style-type: none"><li>- Size 3</li></ul>	Regular (REG) <b>Max Door Leaf:</b> <ul style="list-style-type: none"><li>- Regular 930-2040mm</li><li>- Top Jamb 930-2040mm</li><li>- Parallel Arm 820-2040mm</li></ul> <b>Door Weight:</b> <ul style="list-style-type: none"><li>- Regular 40-65kg</li><li>- Top Jamb 40-65kg</li><li>- Parallel Arm 40-65kg</li></ul>	SE - Sprayed Silver	5 year mechanical	Hold Open Arm (HO)



1120 Series Door Closer



1130 Series Door Closer



Model	Closer Strength	Door Type	Functions	Door Controls	Max door leaf width	Door weight
1120	- Regular 2-4 adjustable - Track arm 1-3 adjustable	- Interior, Exterior, Wood or Metal	Regular (REG) Hold Open (HO)	Regular	850 mm-1100mm	45-80kg
				Top jamb	850 mm-1100mm	45-80kg
				Parallel arm	850 mm-1100mm	40-80kg
				Track arm	750 mm-950mm	20-60kg
1130	- Regular 2-6 adjustable - Track arm 1-4 adjustable	- Interior, Exterior, Wood or Metal	Regular (REG) Hold Open (HO)	Regular	850 mm-1400mm	40-120kg
				Top jamb	850 mm-1400mm	40-120kg
				Parallel arm	850 mm-1400mm	40-120kg
				Track arm	850 mm-1100mm	40-80kg
Technical Specifications			Finishes	Warranty	Accessories	
- Universal application fits standard, top jamb and parallel arm installations - Independent adjustable valves for Backcheck, Closing and Latching speeds - Non-Handed			SE - Sprayed Silver	10 year mechanical	- Hold Open Arm (HO) - Track Arm (T) - Parallel Arm Bracket (PA) - Adaptor Plate (AP) - Parallel Arm Drop Plate (PADP)	



5000  
Floor Spring

Technical Specifications	Functions	Finishes	Warranty	Accessories
<ul style="list-style-type: none"><li>- Supplied complete with top pivot set, bottom strap and cover plate</li><li>- Dual action floor spring with 3 installation adjustments</li><li>- Closing and latching speed adjustments control the door during operation</li><li>- Cast iron body</li></ul> <b>Maximum Door Width and Weight:</b> <b>5003</b> - W1000mm, 100kg <b>5004</b> - W1100mm, 100kg <b>7500</b> - W1400mm, 300Kg <b>Closer Strength</b> <b>5003</b> - 3 <b>5004</b> - 4 <b>7500</b> 3-6 Adjustable	<b>5000</b> Non Hold Open Hold Open 90° Hold Open 105°  <b>7500</b> Non Hold Open Hold Open 90°	SSS - Satin Stainless Steel	10 year mechanical	<ul style="list-style-type: none"><li>- Cover Plate</li><li>- Top Pivot</li><li>- Bottom Strap</li><li>- Offset pivot</li><li>- Interchangeable spindle 5mm-35mm</li></ul>

BRITON 2800 OVERHEAD CONCEALED TRANSOM CLOSER



2800 Overhead Concealed  
Transom Closer

Technical Specifications	Functions	Finish	Warranty	Accessories
<ul style="list-style-type: none"><li>- Adjustable spring strength to suit door size</li><li>- Adjustable closing and latch speed</li><li>- Optional 90° and 105° hold open</li><li>- Side load arm standard, optional end load arm</li><li>- Max door weight 80kg</li></ul> <b>Door Type</b> <ul style="list-style-type: none"><li>- Interior or exterior, wood or metal doors</li></ul> <b>Closer Strength</b> <ul style="list-style-type: none"><li>- 2-4 adjustable</li></ul> <b>Door Size</b> <ul style="list-style-type: none"><li>- Max width 1100mm</li><li>- Max weight 80kg</li></ul>	Non Hold Open Hold Open 90° Hold Open 105°	ALUM-Aluminium	10 year mechanical	<ul style="list-style-type: none"><li>- Cover plate</li><li>- Bottom pivot</li><li>- End load arm</li><li>- Heavy duty pivot</li><li>- Metal Fire Box</li></ul>



Technical Specifications	Door Type	Material	Finish	Warranty
<b>Door opening size:</b> <ul style="list-style-type: none"><li>- COR32 - 864mm-1320mm</li><li>- COR42 - 1320mm-1828mm</li><li>- COR52 - 1575mm-2337mm</li><li>- COR7G - up to 1200mm</li><li>- COR9G - over 1200mm</li></ul>	Timber or Metal	Stainless Steel	COR32, COR42, COR52 - Aluminium COR7G, COR9G - Forged brass	10 year mechanical


Briton Door Selectors



Technical Specifications	Door Type	Material	Finish	Warranty
<b>Door opening size:</b> <ul style="list-style-type: none"><li>- B3000/180 - For pairs of doors up to 1800mm</li><li>- B3000/230 - For pairs of doors up to 2400mm</li><li>- B4000/305 - For doors fitted with exit devices</li></ul>	Timber or Metal	Stainless Steel	Satin Stainless Steel	10 year mechanical



Technical Specifications	Door Type	Material	Finish	Warranty
<ul style="list-style-type: none"><li>- Bolt – 19mm throw with 22mm vertical adjustment</li><li>- Body size: W25mm x L216mm x D52mm</li></ul>	Timber	Steel Plate Cast Brass	Satin Stainless Steel	10 year mechanical

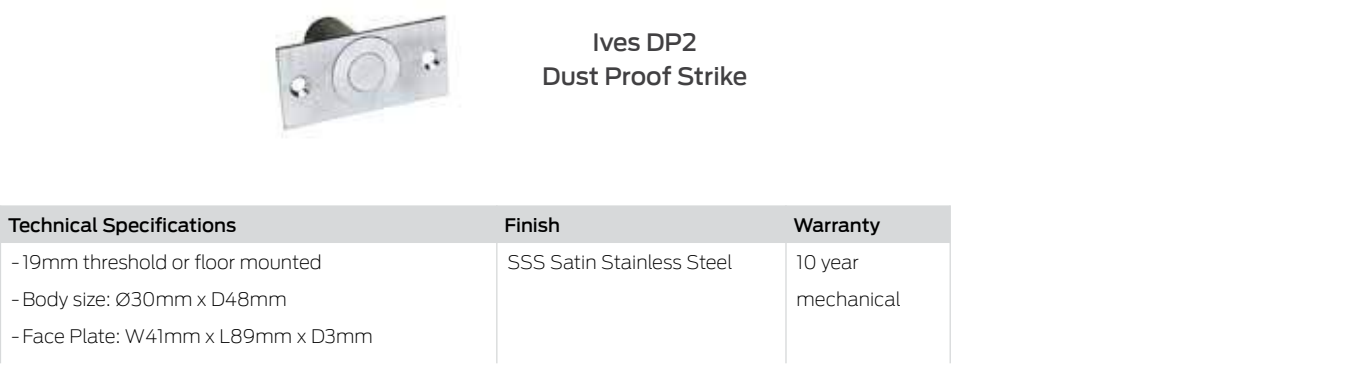

NOTE: It is highly recommended that the DP2 dust proof strike be installed with all automatic flush bolts



**Briton**  
**VON DUPRIN**

Exit  
Devices



BRITON 378E SERIES REVERSIBLE RIM PANIC LATCH



B378E Reversible Rim Panic Latch



Technical Specifications	Function	Finish	Warranty	Accessories
<div>- Single door applications</div> <div>- Tested to 600,000 operating cycles</div> <div>- Reversible</div> <div><b>Door Type:</b></div> <div>- Aluminium</div> <div>- Wood</div> <div>- Hollow Metal</div> <div><b>Door Size:</b></div> <div>- W665mm - 1300mm x H2500mm</div> <div><b>Stile Width:</b></div> <div>- Minimum 78mm with 13mm rebates</div> <div>- Minimum 90mm with 25mm rebates</div>	Rim Latch Exit	SE - Sprayed Silver	10 year mechanical	<div>- Knob Trim (B1413E/KE)</div> <div>- Lever Trim (B1413E/LE)</div>

BRITON 376E SERIES VERTICAL PANIC BOLT



B376E Vertical Panic Bolt



Technical Specifications	Functions	Finish	Warranty	Accessories
<div>- Single and double door applications</div> <div>- Tested to 600 000 operating cycles</div> <div><b>Door Type:</b></div> <div>- Aluminium</div> <div>- Wood</div> <div>- Hollow Metal</div> <div><b>Door Size:</b></div> <div>- W665mm - 1300mm x H2500mm</div> <div><b>Stile Width:</b></div> <div>- Minimum 78mm with 13 mm rebates</div> <div>- Minimum 90mm with 25 mm rebates</div>	<div>Vertical Rod Exit (376)</div> <div>Double Rebated Set (377)</div>	SE - Sprayed Silver	10 year mechanical	<div>- Knob Trim (B1413E/KE)</div> <div>- Lever Trim (B1413E/LE)</div> <div>- Vertical extension rods</div>

VON DUPRIN 22 SERIES TOUCH BAR EXIT DEVICE



Rim Device  
(VD22EO)



Vertical Rod Device  
(VD2227EO)



Technical Specifications		Functions	Finish	Warranty	Accessories
<div>- Single and double door applications</div> <div>- Reversible handing</div> <div>- Surface mounting</div> <div>- Available in two lengths - 914mm &amp; 1220mm</div> <div><b>Door Type:</b></div> <div>- Aluminium</div> <div>- Wood</div> <div>- Metal</div> <div><b>Door Thickness:</b></div> <div>- Surface Mounted - 19mm minimum</div> <div>- Through Bolt - 44mm to 57mm</div>	<div><b>Door Width:</b></div> <div>- 914mm - 673mm Minimum*</div> <div>- 1220mm - 825mm Minimum*</div> <div>*Based on Standard Strike and 13mm stop</div> <div><b>Stile Width:</b></div> <div>- VD22 minimum 111mm</div> <div>- VD2227 minimum 92mm</div>	<div>- VD22EO Rim Device</div> <div>- VD2227EO Vertical Rod Device (Standard door height 2134mm)</div>	ALUM - Aluminium	10 year mechanical	<div>- Alarm kit</div> <div>- Knob Trim</div> <div>- Lever Trim</div> <div>- Nightlatch Trim</div> <div>- Thumbpiece Trim</div> <div>- Vertical extension rods</div>

VON DUPRIN 33A SERIES



VD33EO Exit Device

Technical Specifications	Functions	Finish	Warranty	Accessories
<div>- Single &amp; double door applications</div> <div>- Non-handed</div> <div>- Push pad exit device</div> <div><b>Door type:</b></div> <div>- Wood</div> <div>- Metal</div> <div><b>Door thickness:</b></div> <div>- Surface mounted: 19mm min</div> <div>- Through bolt: 44mm – 57mm</div> <div><b>Door width:</b></div> <div>- 711mm – 914mm*</div> <div>- *based on standard strike and 13mm stop height</div> <div><b>Stile Width:</b></div> <div>- 44mm minimum</div>	<div>- VD33EO – Exit Only Rim Device</div> <div>- VD3327A-EO Exit only Surface Mounted Vertical Rod Device (Standard door height 2134mm)</div>	<div>SCP - Satin</div> <div>Chrome</div> <div>Plate</div>	<div>10 year mechanical</div>	<div>- Exit alarm kit</div> <div>- Electric latch retraction</div> <div>- Nightlatch trim</div> <div>- Lever trim</div> <div>- Vertical extension rods</div> <div>- Hex dogging key</div> <div>- Universal strikes</div>

VON DUPRIN 88 SERIES



VD88EO Exit Device

Technical Specifications	Functions	Finish	Warranty	Accessories
<div>- Single &amp; double door applications</div> <div>- Non-handed</div> <div>- Push bar exit device</div> <div><b>Door type:</b></div> <div>- Aluminium, hollow metal or wood swinging doors</div> <div><b>Door thickness:</b></div> <div>- Surface mounted: 19mm min</div> <div>- Through bolt: 44mm – 57mm</div> <div><b>Door width:</b></div> <div>- 600mm minimum</div> <div><b>Stile Width:</b></div> <div>- VD88EO – 111mm min with standard 299 strike</div> <div>- 100mm min with optional 1606 strike</div> <div>- VD8827EO – 71mm min on single door</div> <div>- 64mm min on double non-rebated doorset</div>	<div>- VD88EO – Exit Only Rim Device</div> <div>- VD8827EO Exit only Surface Mounted Vertical Rod Device (Standard door height 2134mm)</div>	<div>SCP - Satin</div> <div>Chrome</div> <div>Plate</div>	<div>10 year mechanical</div>	<div>- Vertical extension rods</div> <div>- Hex dogging key</div> <div>- Universal strikes</div> <div>- Vertical extension rods</div>

VON DUPRIN 99 SERIES




VD99EO Exit Device



Fire Rated

Technical Specifications	Functions	Finish	Warranty	Accessories
<div>- Single &amp; double door applications</div> <div>- Non-handed</div> <div>- Push pad exit device</div> <div><b>Door type:</b></div> <div>- Aluminium, hollow metal or wood hinged doors</div> <div><b>Door thickness:</b></div> <div>- Surface mounted: 19mm min</div> <div>- Through bolt: 44mm – 57mm</div> <div><b>Door width:</b></div> <div>- 711mm – minimum*</div> <div>- *Based on standard strike and 13mm stop height</div> <div><b>Stile Width:</b></div> <div>- VD99EO/F – 111mm min with standard 299 strike</div> <div>- VD9927EO/F – 94mm minimum</div>	<div>- VD99EO – Exit Only Rim Device</div> <div>- VD99EO-F Exit only Fire Rated Rim Device</div> <div>- VD9927EO – Exit only Surface Mounted Vertical Rod Device</div> <div>- VD9927EO-F Exit Only Fire Rated Surface Mounted Vertical Rod Device (Standard door height 2134mm)</div>	<div>SCP - Satin</div> <div>Chrome</div> <div>Plate</div>	<div>10 year mechanical</div>	<div>- Exit alarm kit</div> <div>- Electric latch retraction</div> <div>- Nightlatch trim</div> <div>- Breakaway lever</div> <div>- Extension rods</div> <div>- Hex dogging key</div> <div>- Universal strikes</div>

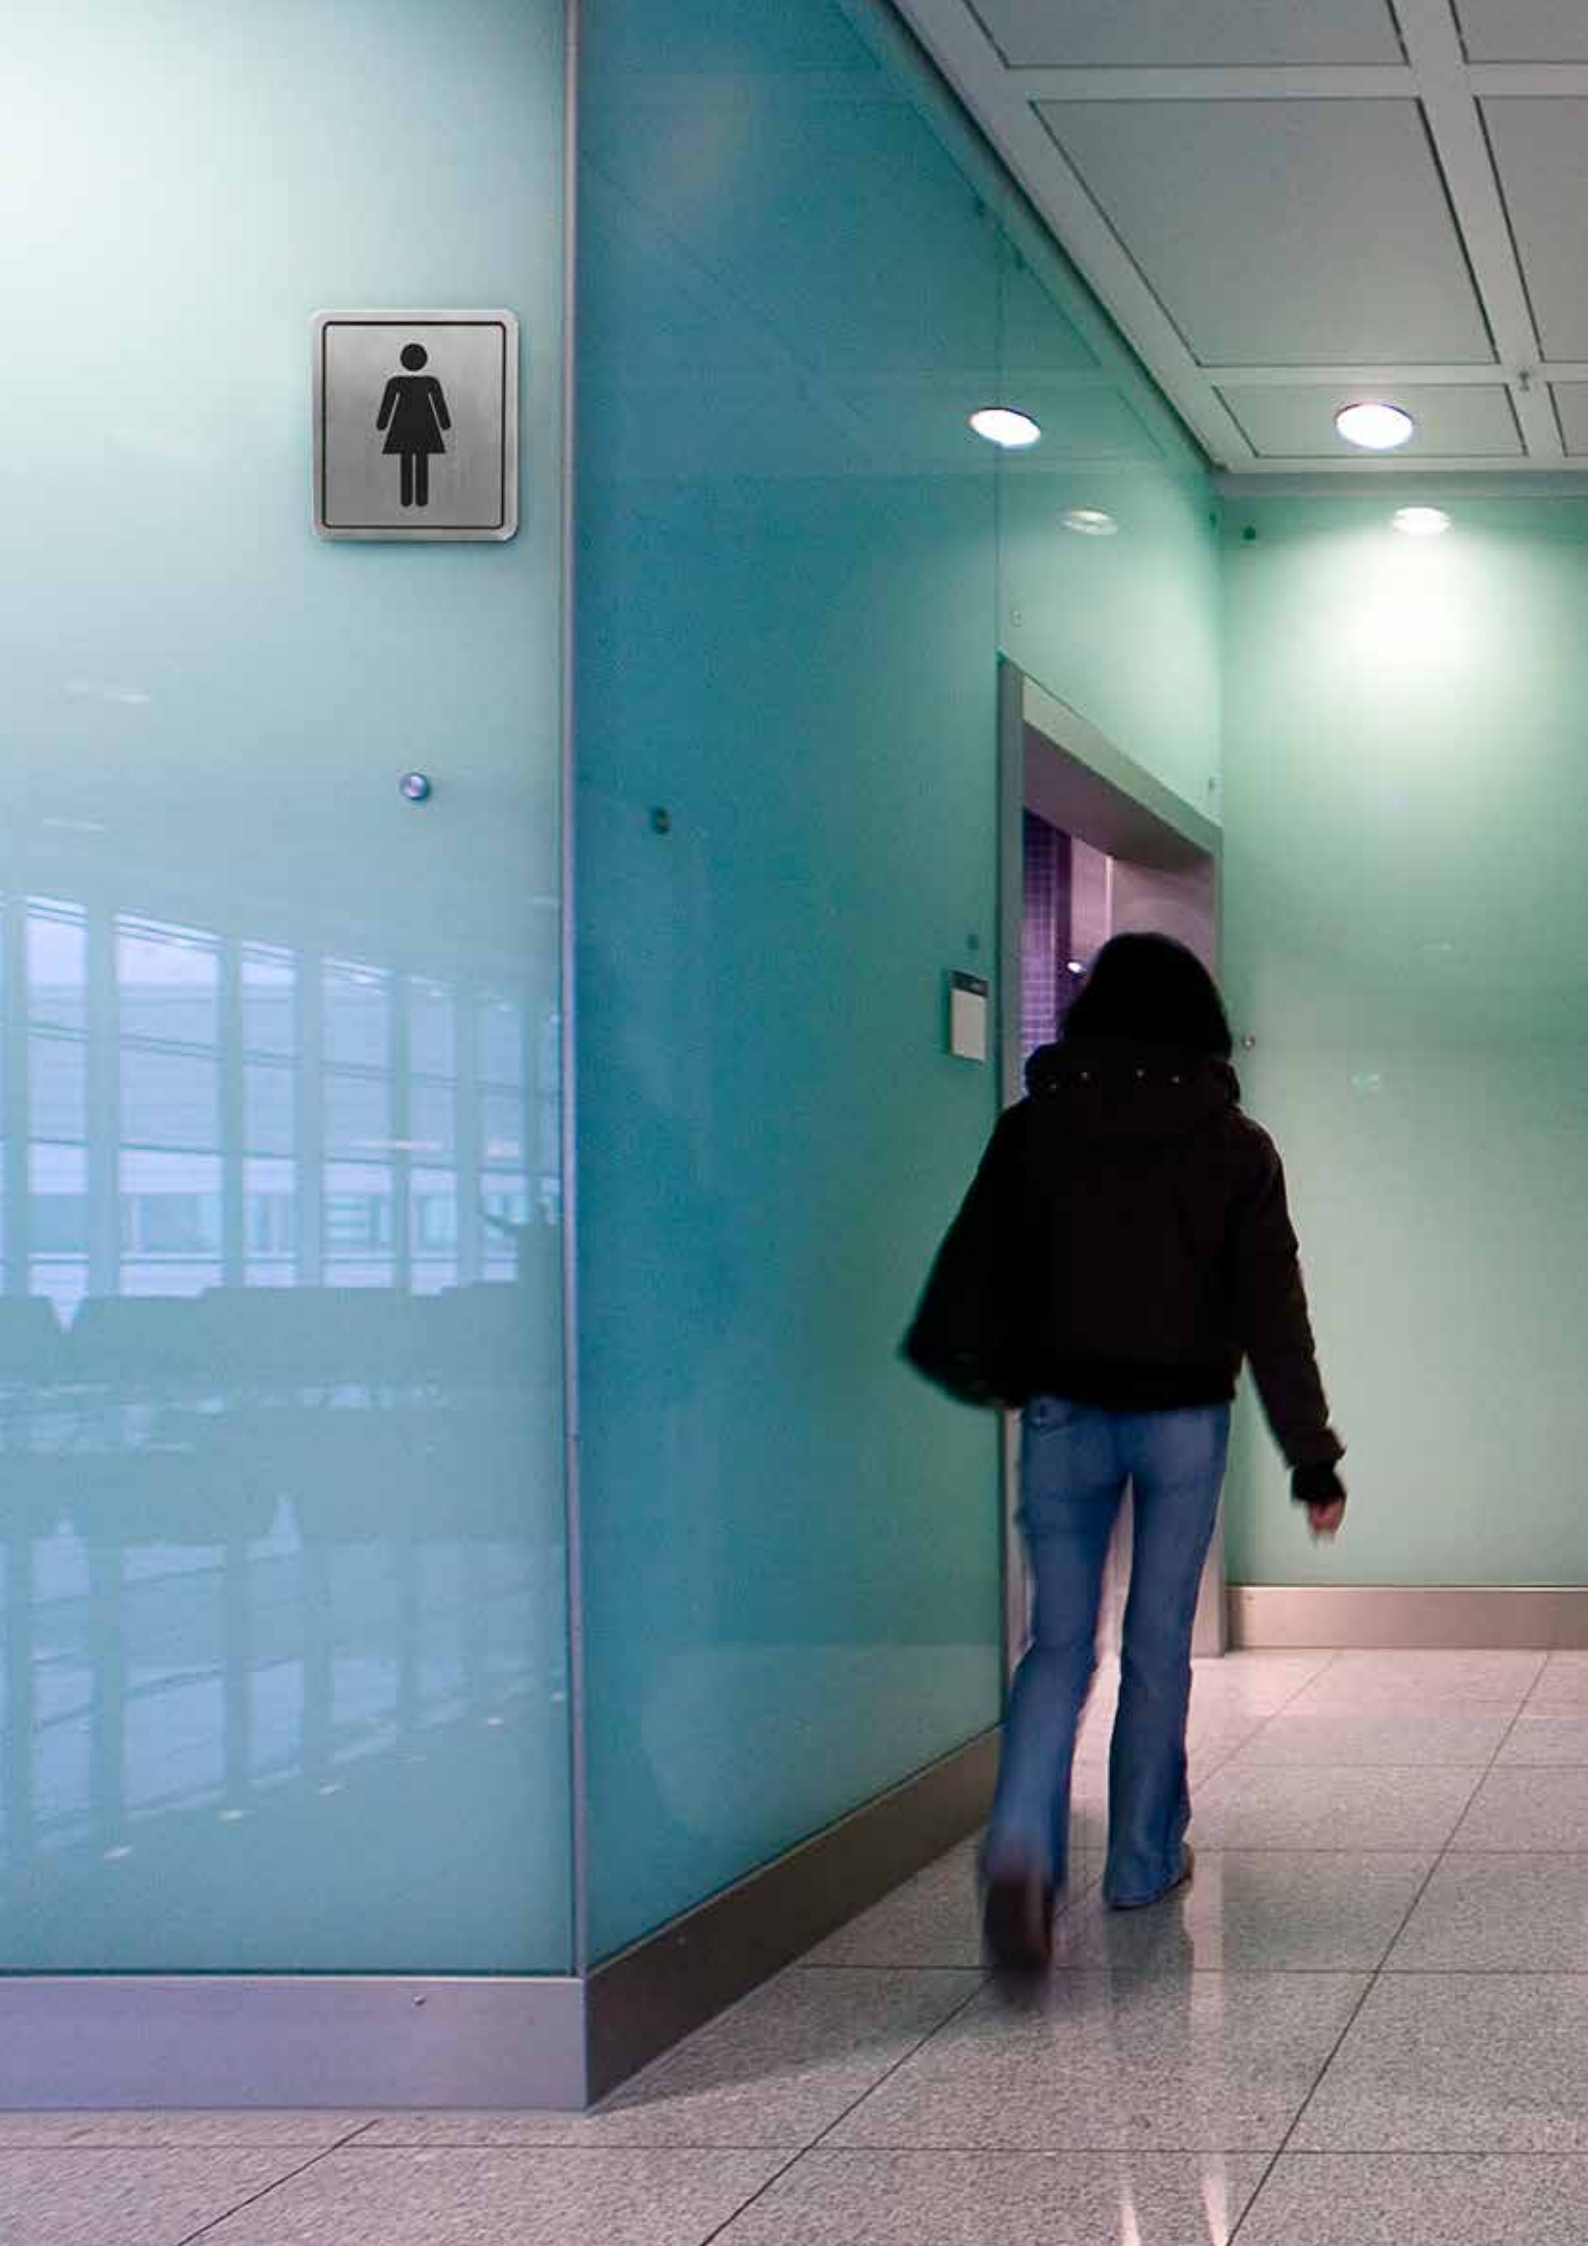

**LEGGE**

General  
Hardware



DOOR STOPS AND HOOKS



Model	Description	Finishes	Size
12801	Floor Mounted Door Stop	ALUM - Aluminum	50mm Diameter
12802	Floor Mounted Door Stop	SSS - Satin Stainless Steel	32mm Diameter
12901	Floor Mounted Dome Door Stop	SCP - Satin Chrome Plate	46mm Diameter
13001	Wall Mounted Door Stop	SSS - Satin Stainless Steel	75mm Projection; 50mm Diameter
12841	Hat and Coat Hook	CP - Chrome Plate	85mm Projection

PULL HANDLES & PUSH PLATES



Model	Description	Finish	Plate Size	Pull Size	Fixing
301	Pull Handle	SSS - Satin Stainless Steel	300mm x 100mm	150mm x 16mm 200mm x 16mm	Visible, Concealed
306	Push Plate	SSS - Satin Stainless Steel	300mm x 100mm		Visible, Concealed
401	Pull Handle	SSS - Satin Stainless Steel	300mm x 65mm	150mm x 16mm 200mm x 16mm	Visible, Concealed
406	Push Plate	SSS - Satin Stainless Steel	300mm x 65mm		Visible, Concealed
601	Pull Handle	SSS - Satin Stainless Steel	300mm x 100mm	200mm x 16mm	Visible Concealed
606	Push Plate	SSS - Satin Stainless Steel	300mm x 100mm		Visible (606-V) Concealed (606-C) Concealed (606-C-to suit 401 Pull)
1351	Pull Handle on 38mm Rose	SSS - Satin Stainless Steel		150mm x 16mm 200mm x 16mm	
1353	Offset Pull Handle on 38mm Rose	SSS - Satin Stainless Steel		200mm x 16mm 300mm x 19mm	

ARCHITECTURAL HINGES



Model	Description	Finish	Size
13221-01	Broad Butt, Loose Pin Hinge	SSS - Satin Stainless Steel	100mmx75mm
13221-03	Broad Butt, Loose Pin Hinge	SSS - Satin Stainless Steel	100mmx100mm
13222-02	Broad Butt Ball Bearing Hinge, Fixed pin	SSS - Satin Stainless Steel	100mm x 75mm
13222-04	Broad Butt Ball Bearing Hinge, Fixed pin	SSS - Satin Stainless Steel	100mm x 100mm
13225	Fast Fix Ball Bearing Hinge, Fixed pin	SSS - Satin Stainless Steel	100mm x 68mm

FLUSH PULLS



Model	Description	Finish	Size
1961 - 01	Square Flush Pull	SSS - Satin Stainless Steel	L120mm x W35mm x D12.5mm
1961 - 02	Square Flush Pull	SSS - Satin Stainless Steel	L150mm x W45mm x D16mm
1962	Round Flush Pull	SSS - Satin Stainless Steel	L100mm x W50mm x D19mm
1964 - 01	Round Flush Pull	SSS - Satin Stainless Steel	L120mm x W35mm x D12.5mm

SIGNAGE




Model	Description	Finish	Size
16241	Male Symbol	SSS - Satin Stainless Steel	H120mm x W110mm
16251	Female Symbol	SSS - Satin Stainless Steel	H120mm x W110mm
16261	Disabled Symbol	SSS - Satin Stainless Steel	H120mm x W110mm

LATCHBACKS



Model	Description	Finishes	Size
WMLB-4	Wall mounted latch back	SCP - Satin Chrome Plate	60mm x 40mm base plate
FMLB-6	Floor mounted latch back	SCP - Satin Chrome Plate	100mm
FMLB-10	Floor mounted latch back	SCP - Satin Chrome Plate	175mm

BOLTS - BARREL, CHAIN & FLUSH

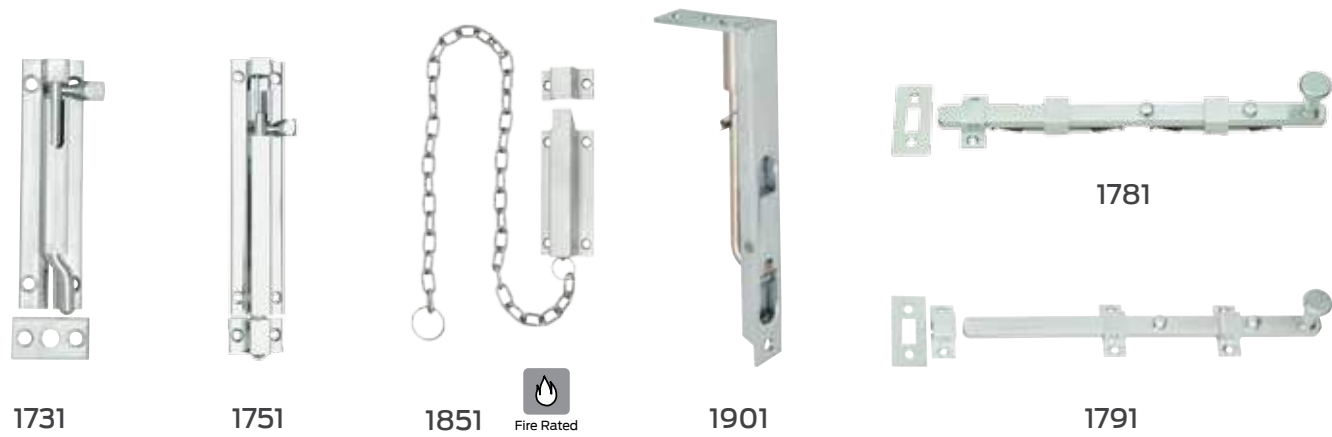

Model	Description	Material	Size
1731	Necked barrel bolt – 25mm throw	Brass	100mm, 150mm (10mm)
1751	Barrel bolt – 25mm throw	Brass	100mm, 150mm, 200mm, 300mm (10mm)
1751LT	Long throw barrel bolt – 40mm throw	Brass	150mm, 200mm (10mm)
1851	Chain bolt 100mm	Stainless steel	600mm chain length
1901	Flush bolt	Brass	100mm, 200mm, 300mm, 450mm, 600mm
1781	Panic bolt – concealed fix	Brass	300mm, 450mm, 600mm
1791	Panic bolt – visible fix	Brass	300mm, 450mm, 600mm

GRAB RAILS



Technical Specifications	Model	Description	Finishes	Size
- US grade 304 stainless steel	LGR610S	Grab rail – straight	SSS - Satin Stainless Steel	610mm length
- Peened grip finish	LGR305-45S	Grab rail – 45°	SSS - Satin Stainless Steel	305mm x 305mm
- Three versions, straight, 45° & 90°	LGR750-90S	Grab rail – 90°	SSS - Satin Stainless Steel	750mm x 750mm
- --Disability code compliant				
- --SSS fixings included				

INDICATOR BOLTS




Technical Specifications	Model	Description	Finishes	Size
- Suitable for timber and metal doors	1461	Indicator bolt	SCP - Satin Chrome Plate	48mm x 48mm
- Clear indication of availability of room	1463	Surface mounted bolt (non-indicating)	SCP - Satin Chrome Plate	69mm x 40mm
- External release slotted button permits access under emergency conditions				

Finish abbreviations

<b>AB</b>	Antique Brass	<b>PB</b>	Polished Brass (US-605)
<b>ALUM</b>	Aluminium (US-689, SP28, MAL)	<b>SA</b>	Satin Aluminium
<b>BB</b>	Bright Brass	<b>SCP</b>	Satin Chrome Plate (US-626, US26D)
<b>BBRZ</b>	Blackened Bronze	<b>SE</b>	Sprayed Silver
<b>Black</b>	Black Powder Coated	<b>SNP</b>	Satin Nickel Plate (US-619)
<b>CP</b>	Chrome Plate (US-625)	<b>SP</b>	Satin Pearl
<b>FB</b>	Florentine Bronze	<b>SSS</b>	Satin Stainless Steel (US-630, US32D)
<b>NP</b>	Nickel Plate		



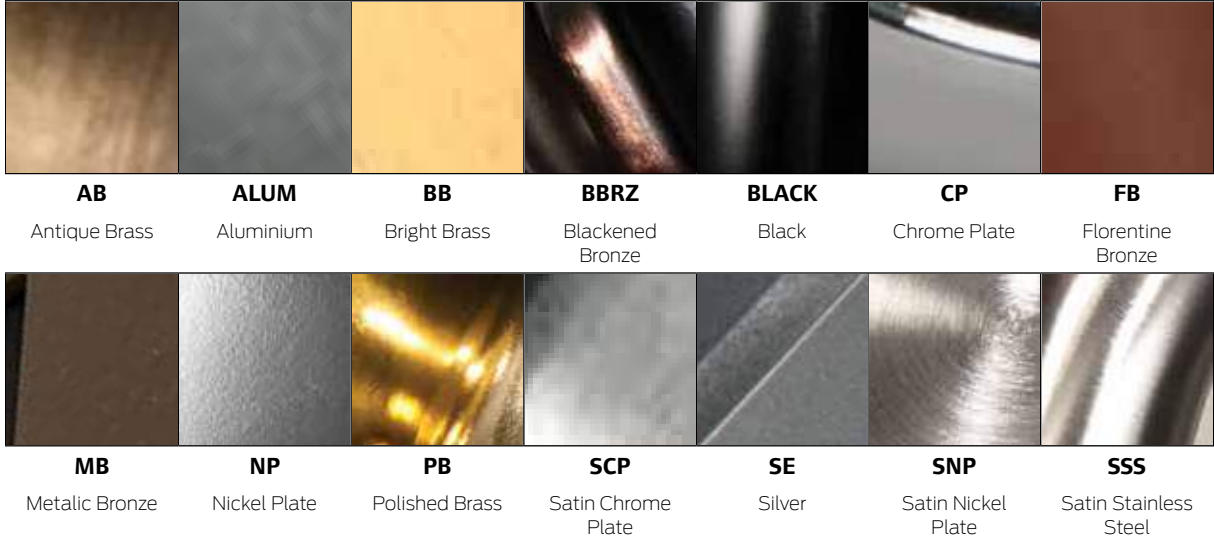


Finish glossary

These colours are indicative only, subject to limitations in the printing process.







Commercial Lock Functions


Keyed Locks

	<b>Entrance/Office Lock</b> Push-button locking. Push-button locks outside lever until unlocked with key or by rotating inside lever.
	<b>Entrance Lock</b> Turn/push-button locking; pushing and turning button locks outside handle requiring use of key until button is manually unlocked. Push-button locking; pushing button locks outside handle until unlocked by key or by turning inside handle.
	<b>Classroom Lock</b> Outside handle locked and unlocked by key. Inside handle always unlocked.
	<b>Storeroom Lock</b> Outside handle fixed. Entrance by key only. Inside handle always unlocked.
	<b>Hotel/Motel Lock</b> Outside handle fixed. Entrance by key only. Push-button in inside handle activates visual occupancy indicator allowing only emergency masterkey to operate. Turning inside handle or closing door releases visual occupancy indicator. Rotation of inside spanner-button provides lockout feature by keeping indicator thrown.





Deadbolt/Deadlatch Locks

	<b>Single Cylinder and Turn Deadbolt</b> Deadbolt thrown or retracted by key from outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.
	<b>Double Cylinder Deadbolt</b> Deadbolt thrown or retracted by key from either side. Bolt automatically deadlocks when fully thrown.
	<b>Nightlatch</b> Deadlocking latchbolt retracted by key from outside or by inside turn unit. Rotating turn unit and activating hold-back feature keeps latch retracted.
	<b>Double Cylinder Deadlatch</b> Deadlocking latchbolt retracted by key from either side. No hold-back feature.

Door handing guide

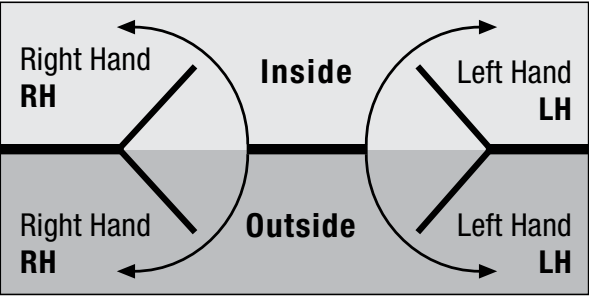

Hinge Handing Guide (Model 13227)


Right Hand Door		Left Hand Door	
Opening In 	Opening Out 	Opening In 	Opening Out 
Outside	Outside	Outside	Outside

Common terms

**Door Preparation** - A term used for the cut-outs or holes made to the door for the particular lock being installed.

**Backset** - The distance from the edge of the door to the centre line of prep in door.

**Door Thickness** - The measurement from outside front through to outside back of door. All locks have a minimum / maximum door thickness which they will fit.

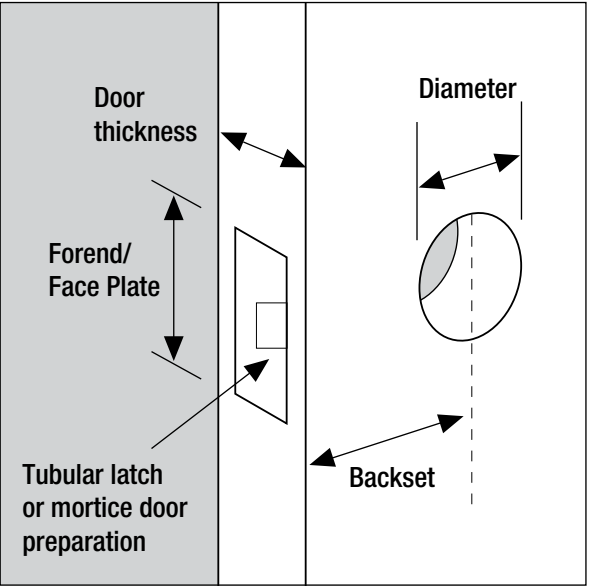

Services


**Scheduling** – A comprehensive door schedule specification service is provided. Door hardware schedules are available with no obligation.

**Master Keying** – Master Keying is a method of controlling access through a building. A key schedule is prepared from provided floor plans. Includes a key tracking system which locates keys and locks and keeps a secure procedure on what keying has been undertaken. Security is based on a system where one lock has its own key. This key will not operate any other locks in the system however where all locks are in the same system the locks can be operated by the one master key.

**Keyed Alike – KA** - More than one lock being operated by the same key.

**Keyed To Differ – KD** – One lock is opened with a single key

Lever dimension guide

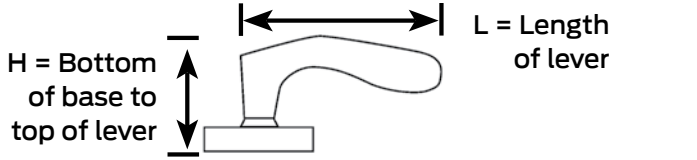

Product application classification

**Residential and Light Commercial** - Moderate use. Typical applications include residential homes, apartments and low traffic offices.

**Commercial** - Moderate to high traffic flow. Typical applications include classrooms, storerooms, entrance / fire applications.

**Heavy Commercial** - Excessive high usage / high security subject to abuse. Typical applications include prisons, stairwell doors and air pressure differential.







## ARCHITECTURAL HARDWARE CONSULTING SERVICES

Allegion products are not only designed to complement your architectural vision, but also to function in a way that suits the operational and security needs of a facility. We offer an extensive range of mechanical and electronic hardware and our experienced team can help you specify the right products to meet the needs of all of your applications and building requirements.

### How we can help

- Hardware specifications
- Door by door schedules
- Product elevations
- Review substitution requests
- Review hardware submittals
- Comprehensive product training
- Compliance to building, life-safety and accessibility codes
- Job site reviews and pre and post installation inspections

### When you partner with Allegion, you receive:

- **A Dedicated Resource.**  
Regionally located so you can count on them, our consultants have a thorough understanding of your firm and clients.
- **Clear Communication.**  
We'll relay any issues or areas of concern and work with you to identify the best solutions.
- **Customised Solutions.**  
We provide solutions that are both aesthetically and functionally appropriate.
- **Security that Matters.**  
Our products exceed the highest security standards as well as provide opportunities to integrate with other systems and features in the building.

### Getting started

Contact us and we'll quickly connect you with an Allegion hardware consultant in your area. To get started, we generally need the following:

- Architectural floor plans
- Door schedule/details
- Door and frame elevations
- Any known requirements

### Contact

Allegion Australia  
Email [auinfo@allegion.com](mailto:auinfo@allegion.com)

Allegion New Zealand  
Email [nzinfo@allegion.com](mailto:nzinfo@allegion.com)



## About Allegion

Allegion (NYSE: ALLE) creates peace of mind by pioneering safety and security. As a \$2 billion provider of security solutions for homes and businesses, Allegion employs more than 8000 people and sells products in more than 120 countries across the world. Allegion comprises 27 global brands, including strategic brands CISA®, Legge®, LCN®, Schlage® and Von Duprin®.

Briton ■  CISA ■ LCN ■  ■  ■ VON DUPRIN

### Allegion Australia

Freephone 1800 098 094  
Freefax 1800 098 095  
Email [auinfo@allegion.com](mailto:auinfo@allegion.com)  
[www.allegion.com.au](http://www.allegion.com.au)

### Allegion New Zealand

Freephone 0800 477 869  
Freefax 0800 477 868  
Email [nzinfo@allegion.com](mailto:nzinfo@allegion.com)  
[www.allegion.co.nz](http://www.allegion.co.nz)

© 2015 Allegion

